

# PFS Injection Quills



***PFS Injection Quills have been developed to allow chemical injection into the center stream of the flow. This ensures the dispersion of chemical in a more uniform manner, providing for a more homogenous mix in the pipeline.***

***Standard features include:***

- 6 materials of construction
- 2 standard sizes available 6" or 8"
- threaded or socket connections
- built in spring loaded check valve
- standard 1/8" orifice discharge and optional 1/4" for higher flow
- pressure range to 3000 PSIG
- temperatures to 260°C (500°F)
- custom materials and sizes available on request

***For detailed product information visit our website: [primaryfluid.com](http://primaryfluid.com)***



**PRIMARY FLUID  
SYSTEMS INC.**

Call Toll Free 1-800-776-6580  
Tel (905) 333-8743 Fax (905) 333-8746

E-Mail: [primary@primaryfluid.com](mailto:primary@primaryfluid.com)  
[www.primaryfluid.com](http://www.primaryfluid.com)

# PFS Injection Quills

For detailed product information visit our website: [primaryfluid.com](http://primaryfluid.com)  
CRN certification available. Contact factory.

## Sizing and Ordering Information

Model	Size (length)	Body Material	Ball Check Material	Check Spring Material	Pressure* Max. PSIG	Temperature Max.
IQ-56-PVC	6"	PVC	Ceramic	316S/S	150	140°F(60°C)
IQ-56-CPVC	6"	CPVC	Ceramic	316S/S	150	210°F(98°C)
IQ-56-PP	6"	PP	Ceramic	316S/S	150	195°F(90°C)
IQ-56-PVDF	6"	PVDF	Ceramic	316S/S	150	260°F(125°C)
IQ-56-316S/S	6"	316S/S	316S/S	316S/S	3000	500°F(260°C)
IQ-56-HastC	6"	Hastelloy	Hastelloy	Hastelloy	3000	500°F(260°C)
IQ-58-PVC	8"	PVC	Ceramic	316S/S	150	140°F(60°C)
IQ-58-CPVC	8"	CPVC	Ceramic	316S/S	150	210°F(98°C)
IQ-58-PP	8"	PP	Ceramic	316S/S	150	195°F(90°C)
IQ-58-PVDF	8"	PVDF	Ceramic	316S/S	150	260°F(125°C)
IQ-58-316S/S	8"	316S/S	316S/S	316S/S	3000	500°F(260°C)
IQ-58-HastC	8"	Hastelloy	Hastelloy	Hastelloy	3000	500°F(260°C)

### Notes and Options:

\* maximum pressure @ 70°F(21°C) working temperature

**Hastelloy C springs** available. Suffix model number with -H for this option (e.g. IQ-56-PVC-H)


**Hastelloy C ball check** available. Suffix model -I (e.g. IQ-56-PVC-I)

**PVDF ball check** available. Suffix model -K (e.g. IQ-56-PVC-K)

**TFE ball check** available. Suffix model -T (e.g. IQ-56-PVC-T)

**CRN certification, other materials of construction and bubble tight/resilient seat check valves available on request. Please contact factory.**

## Dimensional Information

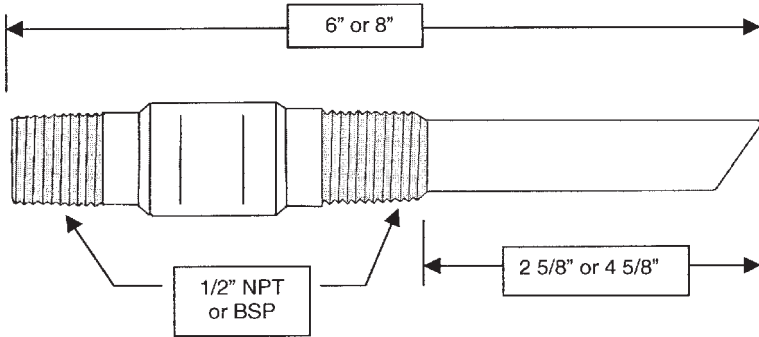


## Capacities at Given Pressure (US and Metric)

Pressure		Flow Rate			
psi	kPa	1/8" Bore		1/4" Bore	
		USGPM	LPM	USGPM	LPM
20	138	0.05	0.19	2.62	9.92
30	207	1.25	4.73	3.98	15.07
40	276	1.55	5.87	4.77	18.06
50	345	1.90	7.19	5.59	21.14
60	414	2.20	8.33	6.39	24.19
70	483	2.48	9.39	7.30	27.63
80	552	2.72	10.30	8.10	30.66
90	621	2.97	11.24	8.82	33.39
100	689	3.21	12.15	9.48	35.87

**Note:** Quills have standard 1/8" discharge orifice for high velocity discharge. Optional 1/4" discharge orifice available for higher capacity flow.

## Typical Metering Pump System

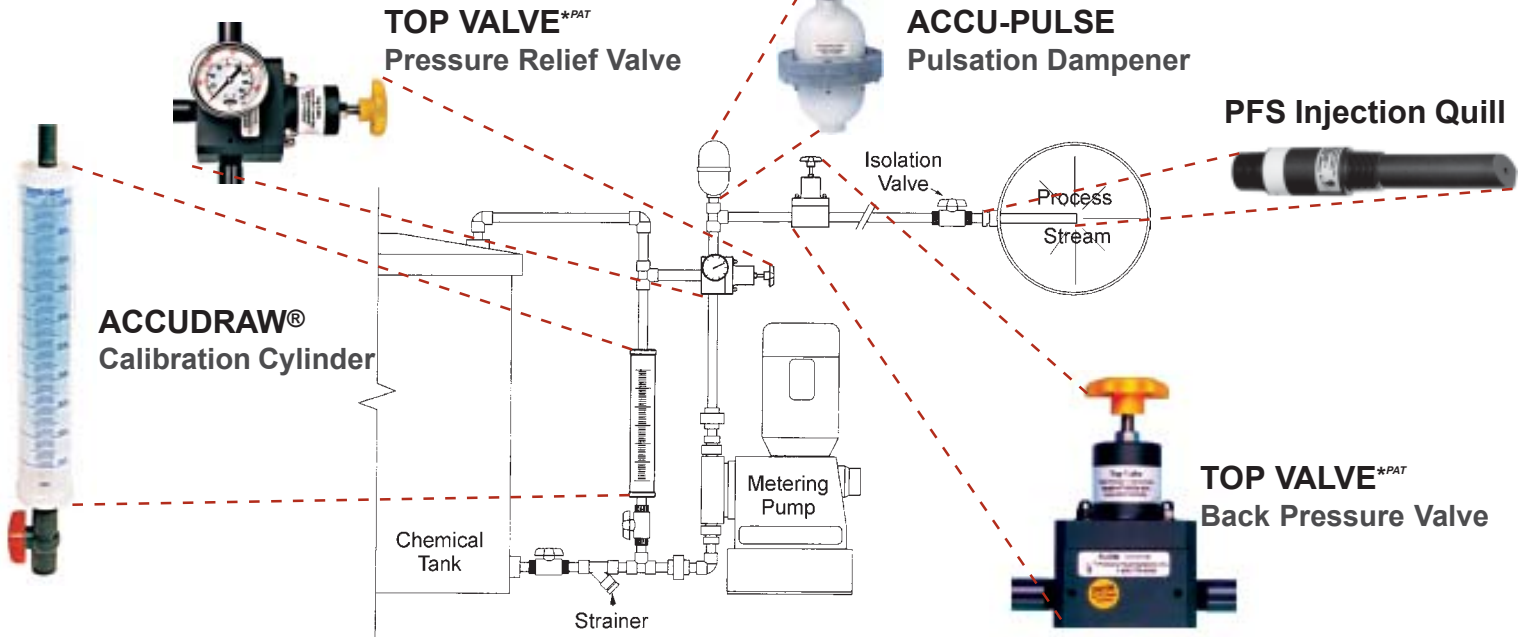

Distributed By:



PRIMARY FLUID  
SYSTEMS INC.

Call Toll Free 1-800-776-6580

Tel: (905) 333-8743

Fax: (905) 333-8746

E-Mail: [primary@primaryfluid.com](mailto:primary@primaryfluid.com)

[www.primaryfluid.com](http://www.primaryfluid.com)

Distribution Territories Available

\*PAT 5,857,486/5,944,050  
© Registered Trade Mark of Primary Fluid Systems

