
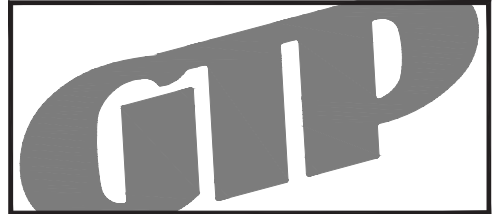


BROMINE FEEDER INSTALLATION

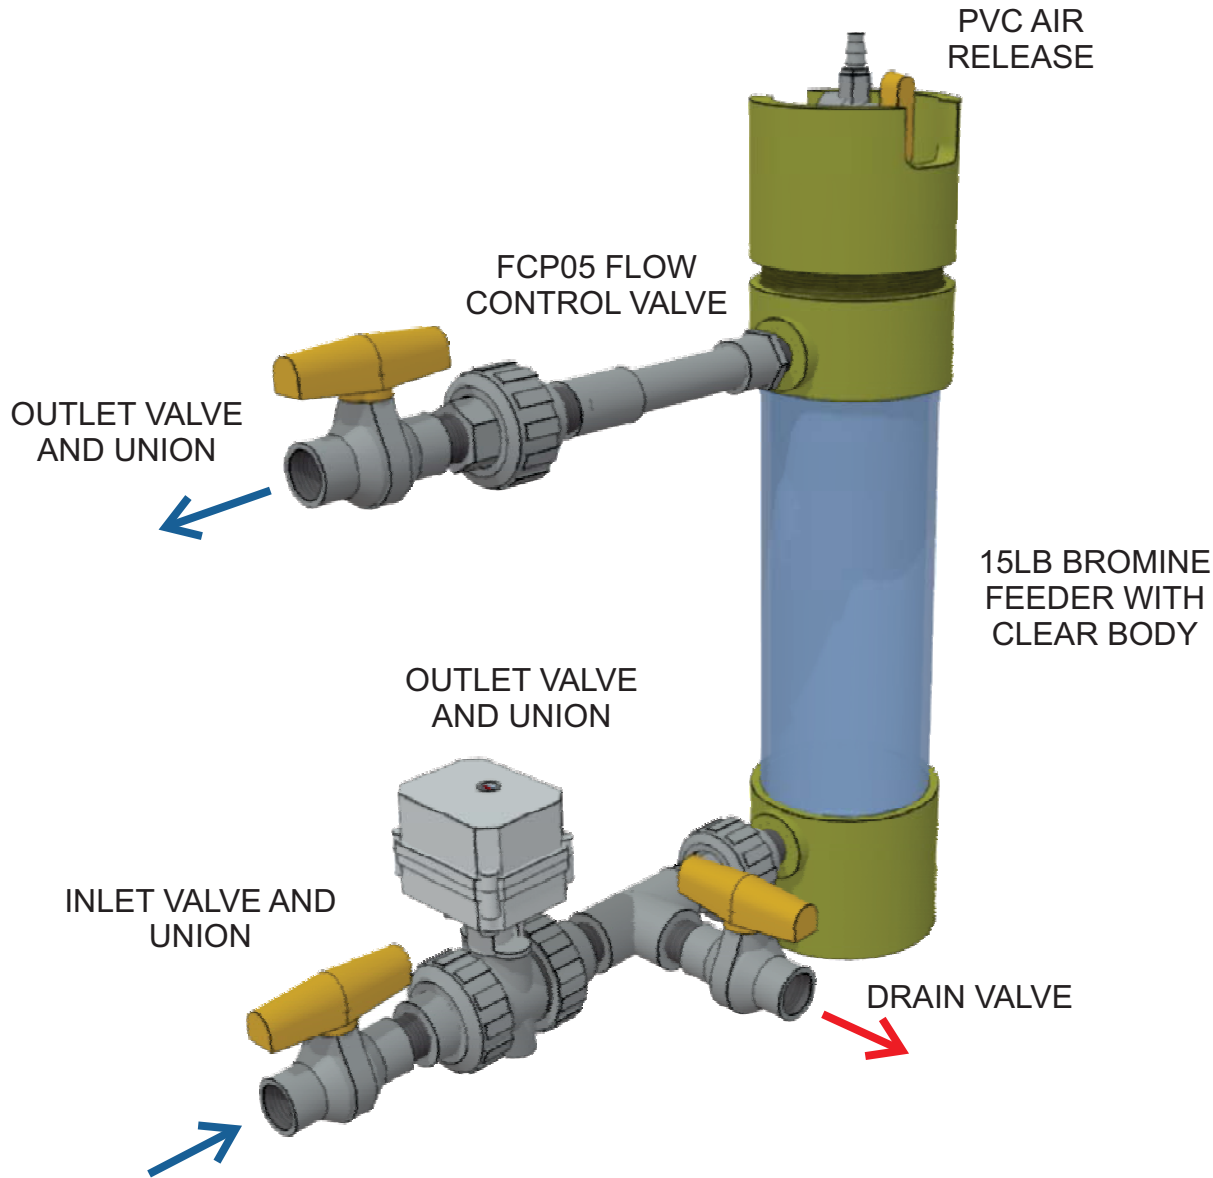

MATERIALS OF CONSTRUCTION:
PVC, SILICONE O-RING, TEFLON SEATS

Capacity:	15	Pounds				
Max Temp.:	70	F				
Max Press.:	85	PSI				
Weight:	20	Lbs.				
Voltage.:	x	VAC	x	Phs	x	Hz
FLA.:	x	amps				

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	PART	DESCRIPTION
F	x	xxV/xxV
E	x	xxV/xxV
D	x	xxV/xxV
C	x	xxV/xxV
B	x	xxV/xxV

General Treatment Products, Inc.
PO Box 8697, Brea, CA 92822
Phone: 714) 257-9165 <http://www.gtpcompany.com>
Fax: 714) 257-9215 customerservice@gtpcompany.com

Date: 1/1/2017 **Scale:** NTS **Rev.:** A

Description:
BROMINE FEEDER INSTALLATION

Model:
BR15-CLR/ARPVC-VPBR-FCP05-MGV07P

NOTICE: This drawing and its contents are for the specific use of GTP customers only. It is not to be duplicated or copied without expressed written consent of General Treatment Products, Inc. We reserve the right to modify this drawing without notice.