


# DOME BOTTOM FEEDER WITH SOCK FILTER INSTALLATION

STANDARD BOLTED CLOSURE  
WITH AIR RELEASE (EXPLODED VIEW)

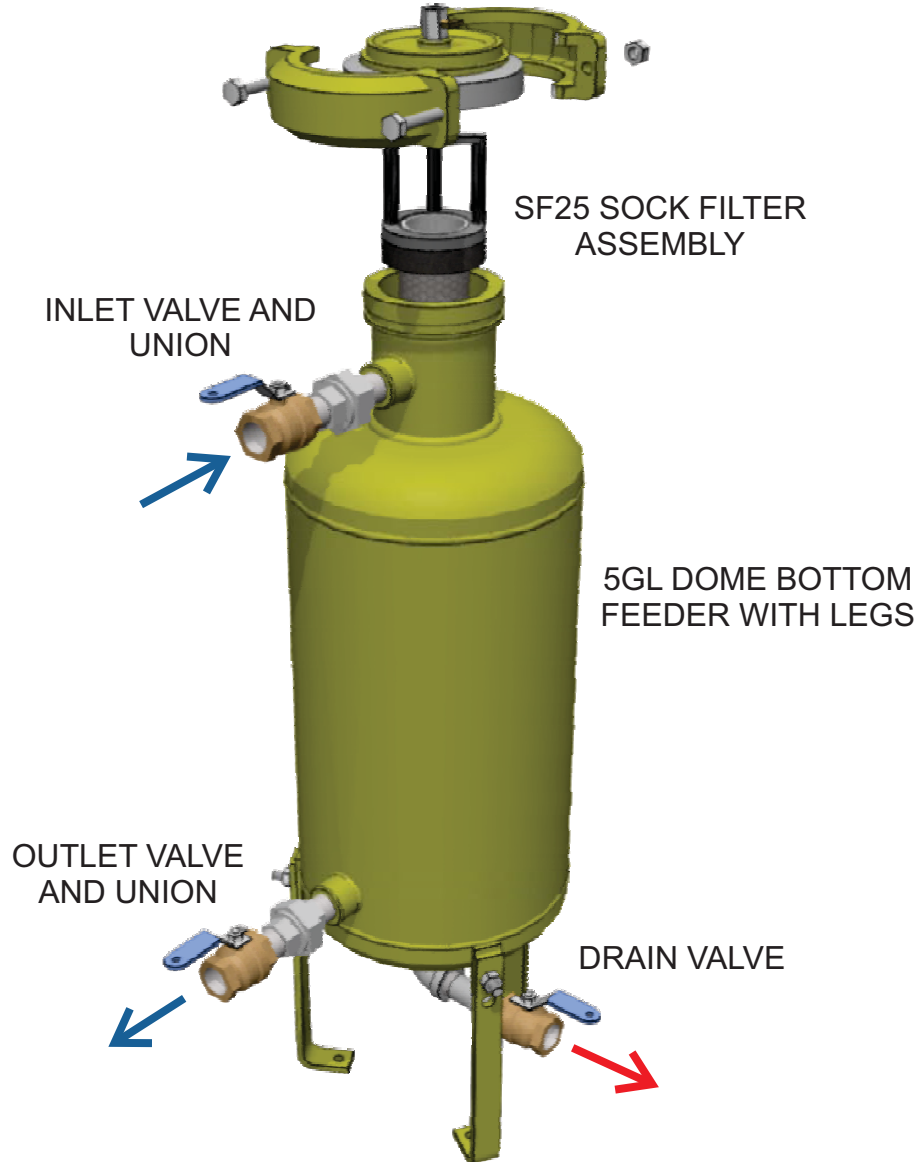

**MATERIALS OF CONSTRUCTION:**  
CARBON STEEL, BUNA-N, BRASS

<b>Capacity:</b>	5	Gallons				
<b>Max Temp.:</b>	200	F				
<b>Max Press.:</b>	300	PSI				
<b>Weight:</b>	46	Lbs.				
<b>Voltage.:</b>	x	VAC	x	Phs	x	Hz
<b>FLA.:</b>	x	amps				

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	DESCRIPTION	DATE
\	<b>PART</b>	<b>DESCRIPTION</b>
F	x	xx/xx/
E	x	xx/xx/
D	x	xx/xx/
C	x	xx/xx/
B	x	xx/xx/

General Treatment Products, Inc.  
PO Box 8697, Brea, CA 92822  
Phone: 714) 257-9165      <http://www.gtpcompany.com>  
Fax: 714) 257-9215      [customerservice@gtpcompany.com](mailto:customerservice@gtpcompany.com)

Date: 1/1/2017      Scale: NTS      Rev.: A

Description:  
DOME BOTTOM FEEDER INSTALLATION

Model:  
DB5/VPDB-SF25