
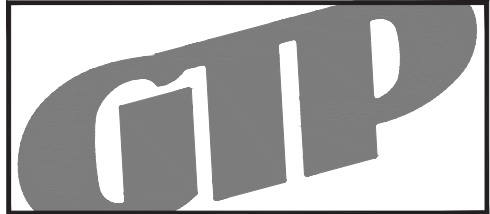


FLAT BOTTOM FEEDER WITH PLEATED FILTER INSTALLATION

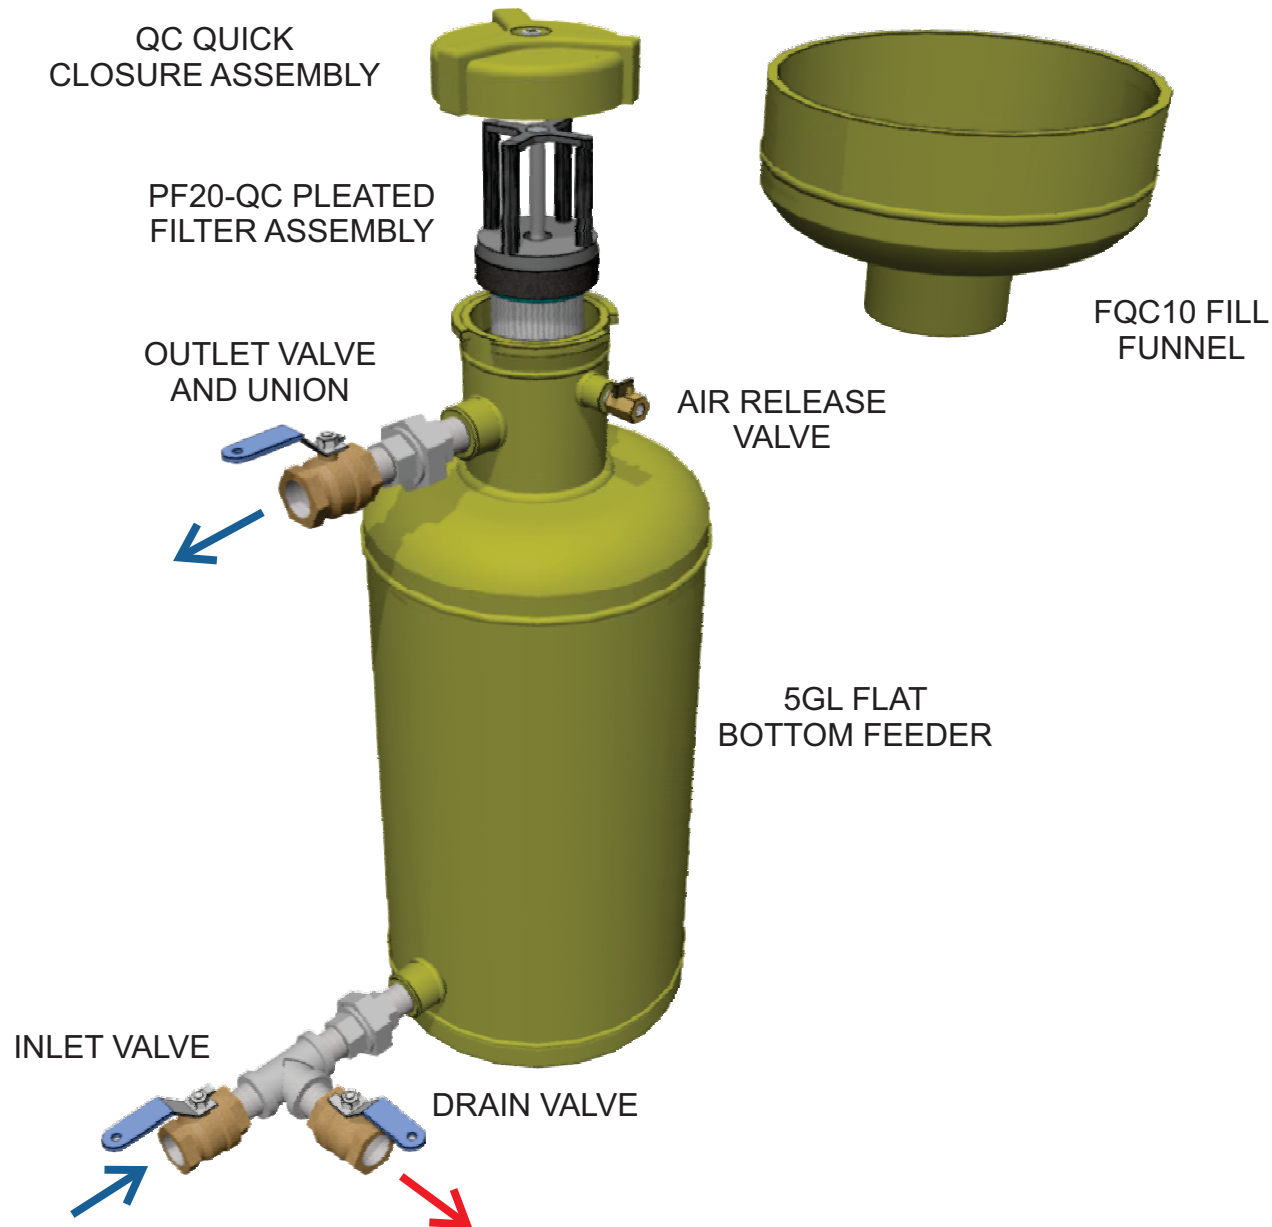

MATERIALS OF CONSTRUCTION:
CARBON STEEL, BUNA-N, BRASS

Capacity:	5	Gallons				
Max Temp.:	200	F				
Max Press.:	200	PSI				
Weight:	46	Lbs.				
Voltage.:	x	VAC	x	Phs	x	Hz
FLA.:	x	amps				

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	PART	DESCRIPTION	DATE
F	x	xxV/xxV	
E	x	xxV/xxV	
D	x	xxV/xxV	
C	x	xxV/xxV	
B	x	xxV/xxV	

General Treatment Products, Inc.
PO Box 8697, Brea, CA 92822
Phone: 714) 257-9165 http://www.gtpcompany.com
Fax: 714) 257-9215 customerservice@gtpcompany.com

Date: 1/1/2017 Scale: NTS Rev.: A

Description:
FLAT BOTTOM FEEDER INSTALLATION

Model:
FB5/QC-PF20-VPFB-AR-FQC10

NOTICE: This drawing and its contents are for the specific use of GTP customers only. It is not to be duplicated or copied without expressed written consent of General Treatment Products, Inc. We reserve the right to modify this drawing without notice.