
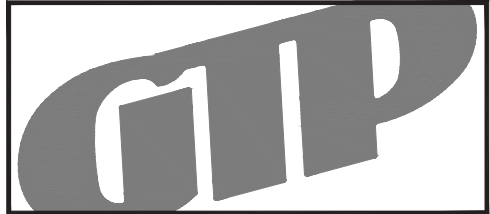


FLAT BOTTOM FEEDER INSTALLATION

STANDARD BOLTED CLOSURE
WITH AIR RELEASE (EXPLODED VIEW)

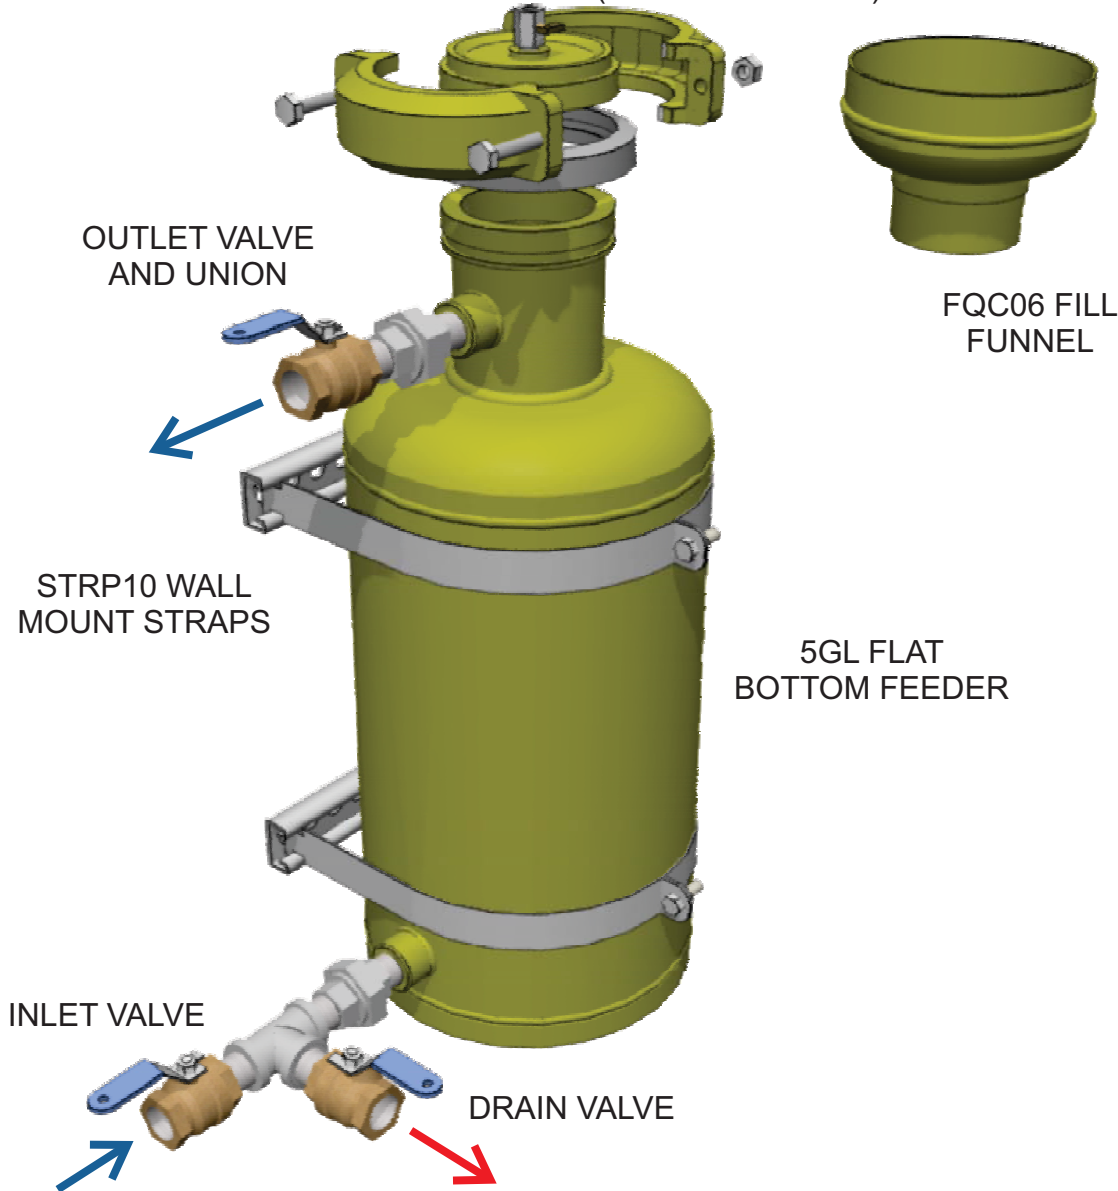

MATERIALS OF CONSTRUCTION:
CARBON STEEL, BUNA-N, BRASS

Capacity:	5	Gallons				
Max Temp.:	200	F				
Max Press.:	300	PSI				
Weight:	46	Lbs.				
Voltage.:	x	VAC	x	Phs	x	Hz
FLA.:	x	amps				

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	DESCRIPTION	DATE
\	PART	DESCRIPTION
F	x	xx/xx/
E	x	xx/xx/
D	x	xx/xx/
C	x	xx/xx/
B	x	xx/xx/

General Treatment Products, Inc.
PO Box 8697, Brea, CA 92822
Phone: 714) 257-9165 <http://www.gtpcompany.com>
Fax: 714) 257-9215 customerservice@gtpcompany.com

Date: 1/1/2017 Scale: NTS Rev.: A

Description:
FLAT BOTTOM FEEDER INSTALLATION

Model:
FB5/VPFB-STRP10-FQC06