


INDUSTRIAL GLYCOL FEED INSTALLATION

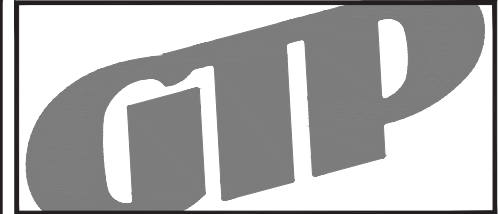

MATERIALS OF CONSTRUCTION:
POLYETHYLENE, PVC, CARBON STEEL, BRASS

Capacity:	30 Gallons
Max Temp.:	85 F
Max Press.:	100 PSI
Weight:	130 Lbs.
Voltage.:	115 VAC 1 Phs 60 Hz
FLA.:	8.2 amps

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	DESCRIPTION	DATE
\	PART DESCRIPTION	
F	x	xx/xx/
E	x	xx/xx/
D	x	xx/xx/
C	x	xx/xx/
B	x	xx/xx/

General Treatment Products, Inc.
PO Box 8697, Brea, CA 92822
Phone: 714) 257-9165 http://www.gtpcompany.com
Fax: 714) 257-9215 customerservice@gtpcompany.com

Date: 1/1/2017 **Scale:** NTS **Rev.:** A
Description:
INDUSTRIAL GLYCOL FEED INSTALLATION
Model:
GP30-E4-1

INDUSTRIAL POLY TANK AND HINGED COVER

ENAMEL PAINTED CARBON STEEL FRAME

OUTLET VALVE

LOCKING NEMA 4 CONTROL PANEL W/CLEAR COVER

DISCHARGE MANIFOLD ASSEMBLY W/ADJUSTABLE SWITCH, PRESSURE RELIEF, CHECK VALVE, ISOLATION VALVE AND PRESSURE GAUGE

SUCTION ASSEMBLY W/CAST IRON Y-STRAINER

INDUSTRIAL LOW LEVEL ASSEMBLY

DRAIN VALVE

1/3HP 115VAC BRASS GEAR PUMP