
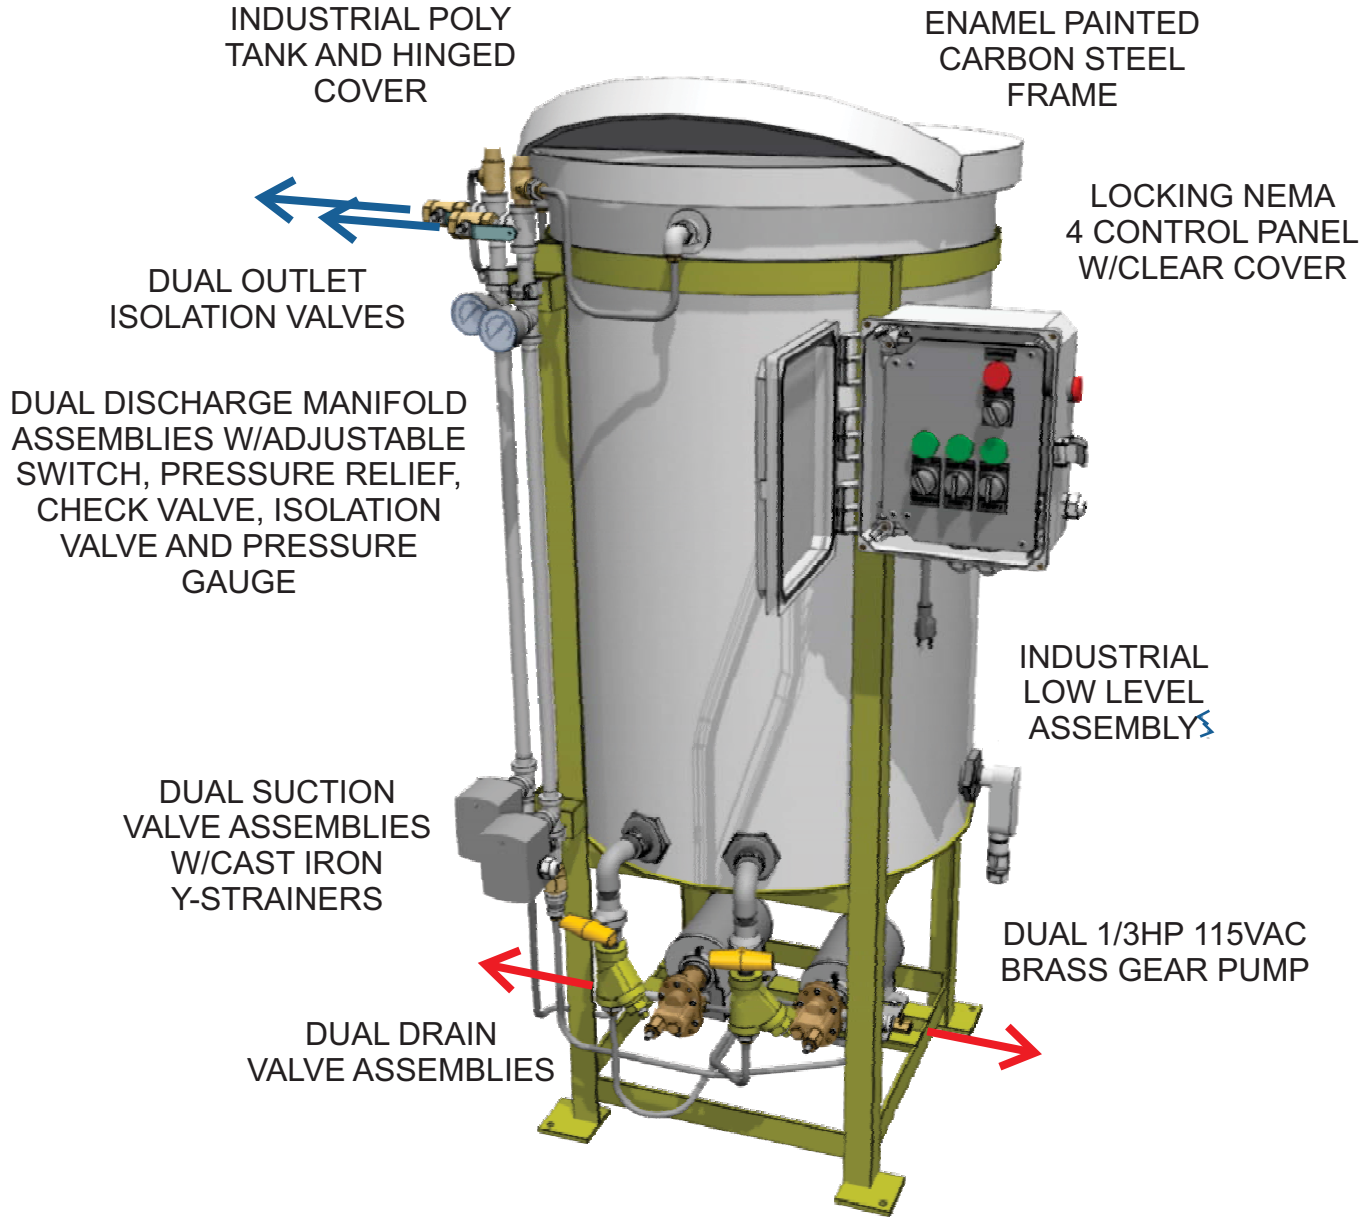


# INDUSTRIAL GLYCOL FEED INSTALLATION

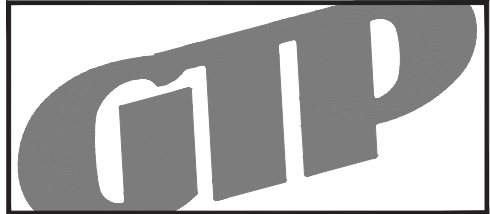

**MATERIALS OF CONSTRUCTION:**  
POLYETHYLENE, PVC, CARBON STEEL, BRASS

<b>Capacity:</b>	55 Gallons
<b>Max Temp.:</b>	85 F
<b>Max Press.:</b>	100 PSI
<b>Weight:</b>	180 Lbs.
<b>Voltage.:</b>	115 VAC 1 Phs 60 Hz
<b>FLA.:</b>	16.4 amps

20	x	x
19	x	x
18	x	x
17	x	x
16	x	x
15	x	x
14	x	x
13	x	x
12	x	x
11	x	x
10	x	x
9	x	x
8	x	x
7	x	x
6	x	x
5	x	x
4	x	x
3	x	x
2	x	x
1	x	x

REV	DESCRIPTION	DATE
\	<b>PART DESCRIPTION</b>	
F	x	xx/xx/
E	x	xx/xx/
D	x	xx/xx/
C	x	xx/xx/
B	x	xx/xx/

General Treatment Products, Inc.  
PO Box 8697, Brea, CA 92822  
Phone: 714) 257-9165 <http://www.gtpcompany.com>  
Fax: 714) 257-9215 [customerservice@gtpcompany.com](mailto:customerservice@gtpcompany.com)

**Date:** 1/1/2017 **Scale:** NTS **Rev.:** A  
**Description:** INDUSTRIAL GLYCOL FEED INSTALLATION  
**Model:** GP55-DE4-1/HM2-AL-DC

NOTICE: This drawing and its contents are for the specific use of GTP customers only. It is not to be duplicated or copied without expressed written consent of General Treatment Products, Inc. We reserve the right to modify this drawing without notice.