
DOUBLE WALL TANK INSTALLATION



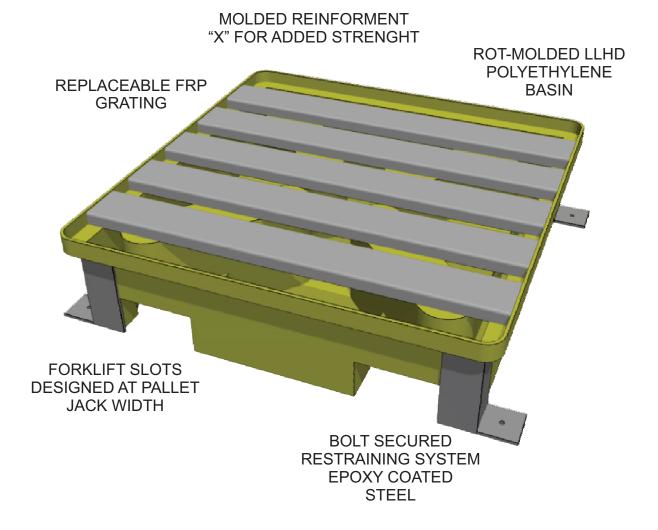

MATERIALS OF CONSTRUCTION: CARBON STEEL, FRP, POLYETHYLENE

Capacity:	40	Gallons			
Max Temp.:	85	F			
Max Press.:	N/A	PSI			
Weight:	52	Lbs.			
Voltage.:	N/A	VAC	Phs	H	z
FLA.:		amps			
20 x		x			
19 x		x			
18 x	2	x			
17 x		x			
16 x		x			
15 x		X			
14 x		X			
13 x 12 x		x			
		X			_
11 x 10 x		x x			_
9 X		x X			-
8 x		x			-
7 x		x			-
6 x		X			-
5 x		x			\neg
4 x		x			-
3 x		x			
2 x	2	x			
1 x		X			
\ PART	l	DESCRIPTIO	N		_
F x				xx∖/x	_
E x				xx∖/x	_
D x				xx∖/x	_
Сх				xx√x	_
Вх				xx∨x	x∨
REV DESCRIPTION DATE					
General Treatment Products, Inc. PO Box 8697, Brea, CA 92822 Phone: 714) 257-9165 http:\/\/www.gtpcompany.c Fax: 714) 257-9215 customerservice@gtpcompany.com					
	/2017	Scale:	NTS	Rev.:	Α
Description: DOUBLE WALL TANK INSTALLATION					

SP3636G-R