




APPLICATIONS

- Conductive fluids
- Small pipe applications (1"-12")
- Industrial processes
- Chemical metering pumps
- Fertigation

FEATURES

- No moving parts
- Economical
- Durable
- Easy to install
- Easy to maintain

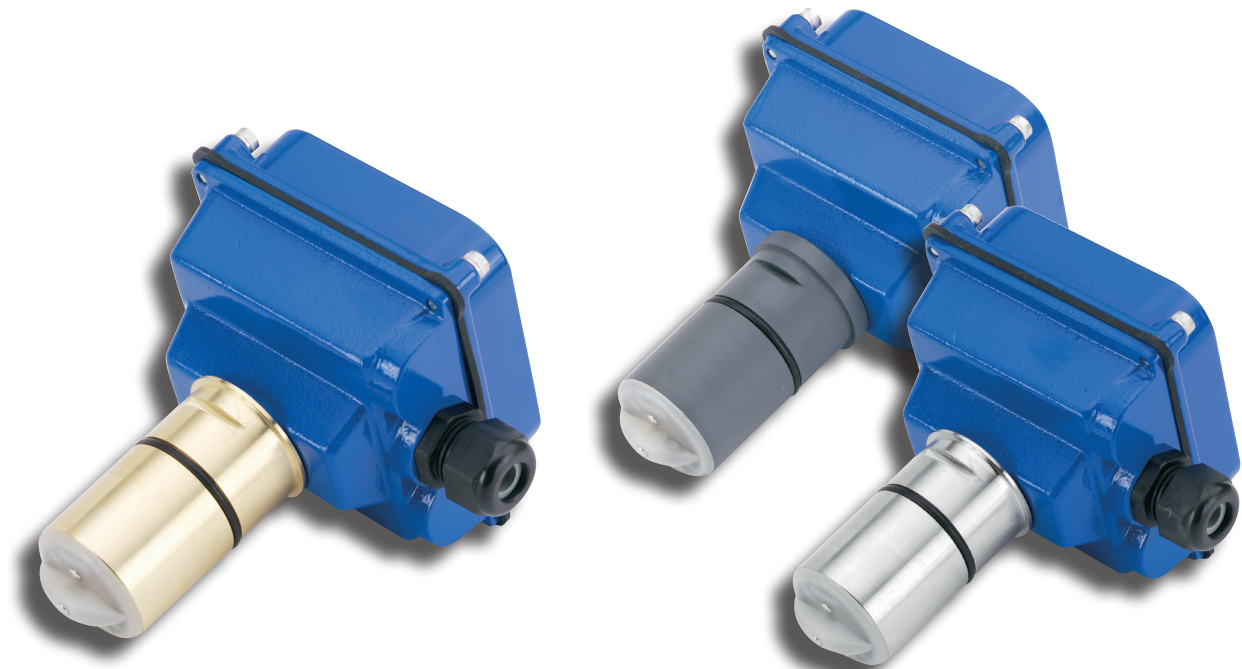

GENERAL INFORMATION

EX80-Series insertion electromagnetic flowmeters are designed for use with conductive liquids in 1 to 12" pipe. A choice of materials (stainless steel, brass, and PVC) allows the meter to adapt to a range of temperature, pressure, and corrosive environments.

The EX80 is highly suitable for difficult applications with changing viscosities and pulsating flows, such as air-driven diaphragm pumps. With no moving parts, these meters can be used in "dirty" applications where debris would foul a mechanical meter. Like all magmeters, when used in chemical injection applications, these meters should be installed upstream of the chemical line (or far enough downstream to allow complete mixing of fluids before the meter).


Designed for modularity and versatility, the EX80-Series has a current-sinking pulse output that can be combined with the appropriate transmitter or indicator for the application. For

analog output and display of rate and total, an FT420 can be used. Blind analog output is provided by the A055. The PD10 can be used to divide the pulse for pacing chemical metering pumps and the DL76 (data logger) is also compatible. Modules can be wall- or meter- mounted. If the EX80 meter is used with a programmable controller, the output signal can be fed direct, with no other conditioning required.

EX80-Series fixed depth insertion meters require special fittings. Factory installation in the fitting ensures correct depth placement in the pipe. The EX80-Series meter can be ordered in a full power model when a source of electricity is available, or in a low power model that can run on an external battery with solar panel.

Reverse flow output and immersibility are optional.

FEATURES

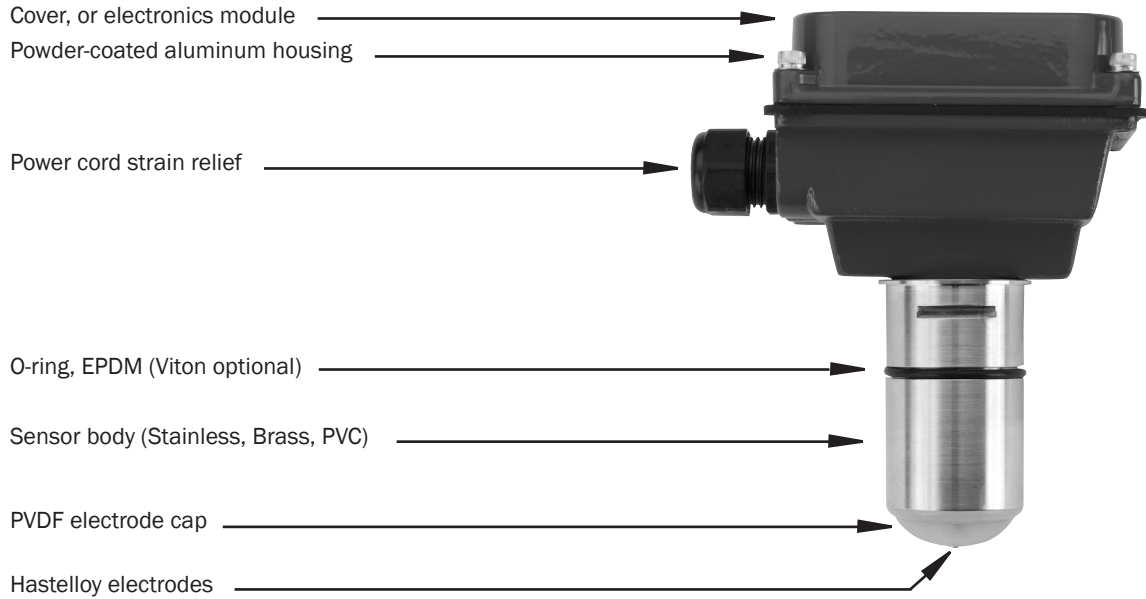


SPECIFICATIONS*


| | | |
|-----------------------------|------------------------------|--|
| Pipe Size | | 1" to 12" |
| Materials | Mechanical | 316 SS/Brass/PVC |
| | Electrodes | Hastelloy |
| | Housing | Cast powder-coated aluminum |
| | Electrode Cap | PVDF (Kynar) |
| | O-Ring | EPDM standard (Viton optional) |
| Power | Full Power | 12 - 25 Vdc, 250 mA |
| | Low Power | 12 - 25 Vdc, 40 mA average with 250 mA peaks |
| Flow Rate | | 0.28 - 20 ft/sec (0.08 - 6.09 m/sec) |
| Temperature | Ambient Temp | 0° to 160° F (-17° to 72° C) |
| | Fluid Temp : Brass/SS | 32° to 200° F (0° to 93° C) |
| | Fluid Temp: PVC | 32° to 130° F (0° to 55° C) @ 0 psi |
| Pressure | Brass/SS | 200 psi (13.8 bar) |
| | PVC | 150 psi (10 bar) @ 75° F |
| Minimum Conductivity | | 20 microSiemens/cm |
| Calibration Accuracy | | +/- 1% of full scale |
| Output | | Square wave pulse, opto isolated, 550 Hz @ 20 ft/sec |
| Empty Pipe Detection | | Software, defaults to zero flow |
| Regulatory | | CE Mark (Stainless Steel, Brass and Standard Power Only) |

*Specifications subject to change • Please consult our website for current data (www.seametrics.com).

DIMENSIONS

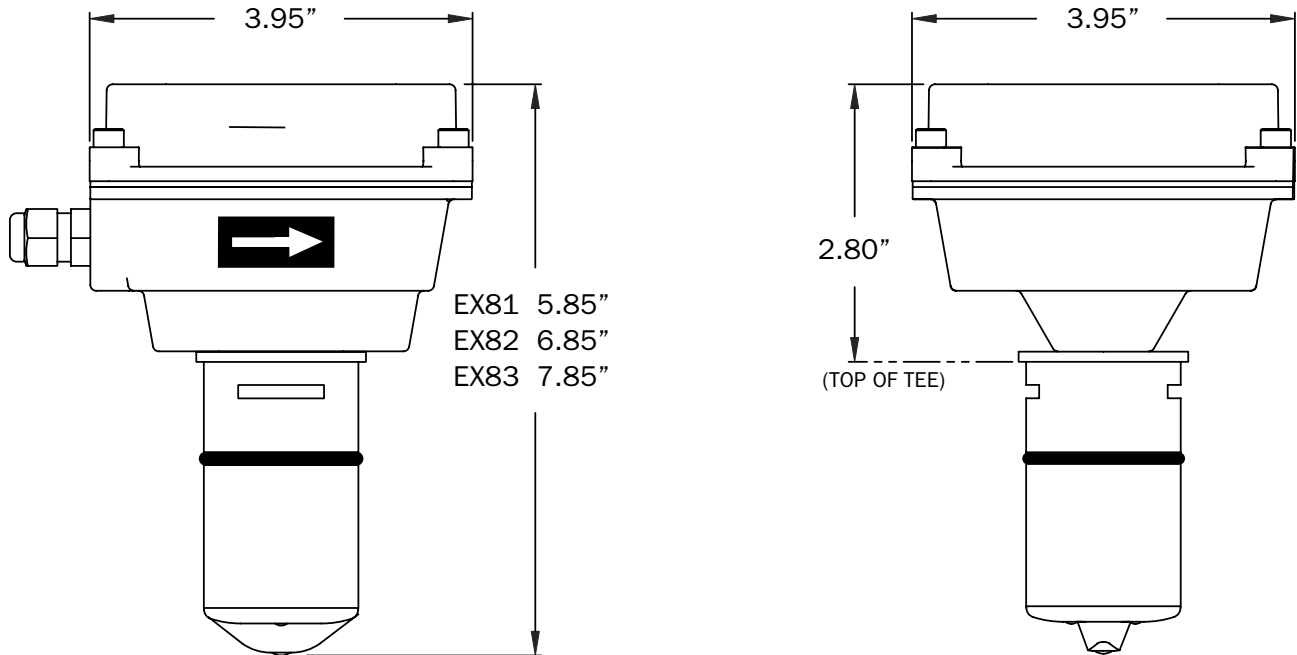

PRESSURE VS. TEMPERATURE (PVC)

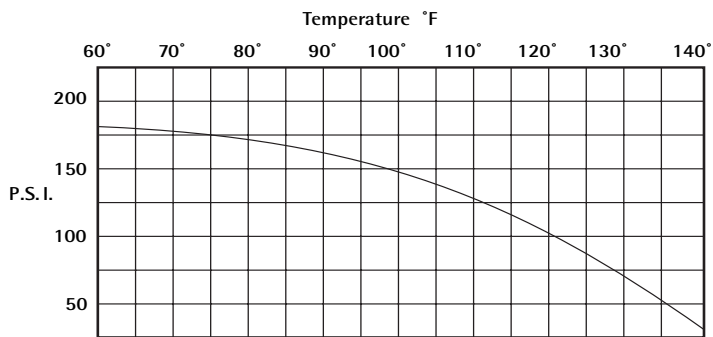

FLOW RANGE (in GPM)

| Nominal Pipe Size | 1" | 1-1/2" | 2" | 3" | 4" | 6" | 8" | 10" | 12" |
|-------------------|-----|--------|-----|-----|-----|------|------|------|------|
| Min | .69 | 1.5 | 2.7 | 6.2 | 11 | 25 | 43 | 68 | 99 |
| Max | 49 | 110 | 196 | 440 | 783 | 1760 | 3130 | 4900 | 7050 |

EX80-COMPATIBLE FITTINGS



| | Tee | Saddle | Weld/Braze | Sweat Tee |
|------------------------|------|--------|------------|-----------|
| Bronze | 1-4" | 3-4" | 3-12" | 1-4" |
| PVC | 1-2" | 3-8" | x | x |
| Stainless Steel | 1-2" | x | 3-12" | x |
| Carbon Steel | 1-2" | x | 3-12" | x |
| Ductile Iron | x | 3-12" | x | x |

HOW TO ORDER

| MODEL | MATERIAL | OPTIONS | FITTINGS |
|--|---|--|--|
| 1" - 3" pipe = EX81 4" - 10" pipe = EX82 12" pipe = EX83 | PVC = P Brass = B 316 Stainless = S | Reverse flow output = -15 *Immersible = -40 Low power = -50 Viton O-ring = -125 | Select from chart above (Fitting Type and Material) |
| *Consult factory for suitable applications | | | |
| ACCESSORIES | | | |
| Rate and Total Indicator = FT420 Blind 4-20 mA Converter = AO55 Data Logger = DL76 Pulse Divider = PD10 | Extra Cable (specify length) = 31010 Power Converter, Plug-In, 115 Vac, 24 Vdc = PC3 Dual Power Supply, 115 Vac, 12/24 Vdc = PC42 Solar Panel Kit, 5 Watt = RSP5 | | |

CONTACT YOUR SUPPLIER