



Residential Gly-Pack Wall Mount Bracket Instruction Manual

Manufacturing: Bypass & Filter Feeders, Glycol Feed Packages, Tanks, Tank Stands, Chemical Batch Mixers, Corrosion Coupon Racks and Custom Systems

Contents	Page
1.0 Introduction	1
2.0 Warranty	1
3.0 Unpacking	2
4.0 Location	2
5.0 Installation	2
8.0 Parts Listing	2

***** WARNING *****

- ✦ ALL FASTENERS SHOULD BE PROPERLY SECURED BEFORE OPERATION AS THEY MAY BE LOOSENED IN TRANSIT
 - ✦ PERSONNEL SAFETY PRACTICES SHOULD APPLY AT ALL TIMES
 - ✦ SAFETY GLASSES OR FACE SHIELDS AND GLOVES SHOULD BE WORN
 - ✦ DO NOT SERVICE GLYCOL FEED PACKAGE WITH OUT DISCONNECTING POWER
- ✦ CLOSE ISOLATION VALVE AND RELEASE PRESSURE BEFORE SERVICING ANY COMPONENTS ON THE SYSTEM
 - ✦ ALL LIQUIDS IN SYSTEM SHOULD BE DRAINED BEFORE SERVICING

✦ **1.0 Introduction**

Thank you for choosing General Treatment Products Residential "Gly-Pack" Glycol Feed Package and Wall Mount Bracket. For further information, please contact us at customerservice@gtpcompany.com or call us at the phone number on the cover.

✦ **2.0 Warranty**

General Treatment Products Gly-Pack Feed Systems are guaranteed for two years from date of shipment against manufacturing defects in material and workmanship that develop in the service for which they are designed. We will repair or replace a defective part of this system when returned to our factory with freight prepaid; providing that the part is found to be defective upon inspection. We assume no liability for labor and/or other expenses in making repairs or adjustments.

✧ 3.0 Unpacking

Upon receipt of order, inspect package thoroughly. In the event there was damage incurred in transit you must notify the freight company within **3-5 days of receipt of order**. Once system is inspected for damage and received in good condition, and store indoors until installing.

Gly-Pack Wall Mount Bracket will come complete with lower tank support, upper wall bracket, 2 support legs, stainless steel mounting and leg hardware.


✧ 4.0 LOCATION AND ENVIRONMENT

Although some of the components are NEMA rated, the gear pump, pressure switch and power cord should not be exposed to direct elements. In all cases a shelter, awning or shed needs to be installed or glycol feed packages need to be installed indoors to validate warranty.

✧ 5.0 INSTALLATION

Once location is decided on, system need to be securely mounted to wall studs with mounting brackets or to firm level secure. **Be sure that mounting pads/wall studs and anchoring bolts comply with local building codes.**

Wall mount assembly drawing for 7 gallon model shown below. For 15 gallon version, change 6" dimension with 12".

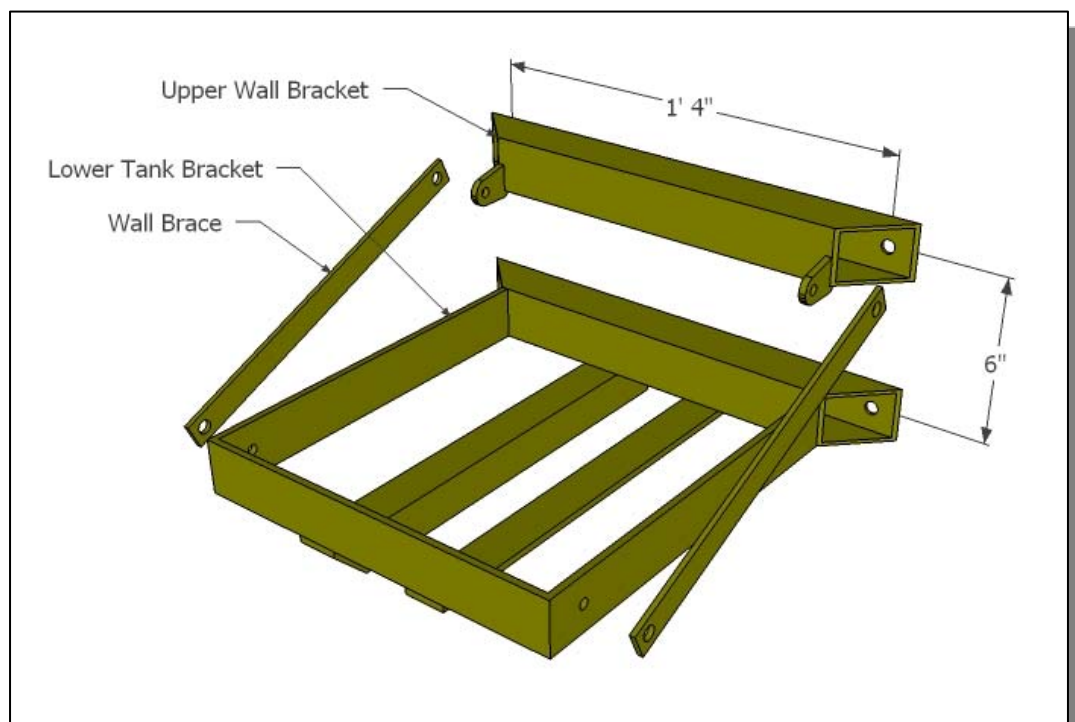

✧ 8.0 PARTS LISTING

Parts, such as hardware and new mount brackets are available upon request. Please have model and serial number available when requesting parts.

P.O. Box 8697, Brea, CA 92822-5697 ♦ Phone: 714) 257-9165
113 Viking Ave., Brea, CA 92821 ♦ Fax: 714) 257-9215
www.gtpcompany.com ♦ customerservice@gtpcompany.com